



The bridge to possible



# Cisco 2-Channel SFP WDM Transponder Datasheet

## Contact Us

Phone: +852-51736677

Skype: wendycisco

WhatsApp: +852-51736677

E-mail: [wendy@donewin.com.hk](mailto:wendy@donewin.com.hk)

# Contents

Product overview	3
Applications	5
Product specifications	6
Ordering information	9
Cisco environmental sustainability	9
Service and Support	10
Cisco Capital	10
For more information	10

The Cisco® 2-Channel SFP WDM Transponder expands the range of applications and platforms supported by coarse wavelength-division multiplexing (CWDM) and dense wavelength-division multiplexing (DWDM) pluggable optics solutions from Cisco. It supports any client, any protocol, and any speed between 155 Mbps (OC-3/STM-1) and 2.488 Gbps (OC-48/STM-16).

## Product overview

The Cisco 2-Channel SFP WDM Transponder (Figure 1) is an unmanaged unit that can be used to convert any incoming optical signal into a CWDM or DWDM channel. Its flexibility in terms of data rates, protocols, and wavelength-division multiplexing (WDM) options is provided by Cisco pluggable optics, which reside on both the client side and the trunk side.

In addition, when Small Form-Factor Pluggable (SFP) devices with the same wavelength reside on client and trunk sides, the unit can be simply used as a 3R regenerator (re-amplification, reshaping and retiming) for the uplink data stream (client to network path) and a 2R regenerator (re-amplification and reshaping) for the downlink data stream (network to client path), turning it into a very dynamic and flexible module.



**Figure 1.**  
Cisco 2-Channel SFP WDM Transponder

The transponder effectively extends the range of client devices that can connect to the CWDM or DWDM network using pluggable optics: third-party SONET/SDH add/drop multiplexers (ADMs), storage and Ethernet devices, or Cisco platforms that do not support pluggable WDM optics can connect to the WDM network by using this transponder, which operates the wavelength conversion from older 850/1300/1550 nanometer (nm) signals to any CWDM or DWDM channels. This conversion is enabled by the WDM SFP ports sitting on the line side (Figure 2).



**Figure 2.**  
SFP Ports on the transponder

Each transponder supports up to two CWDM or DWDM line SFP optics (plugged into the ports labeled “NTWK1” and “NTWK2”) as well as two client SFP optics (plugged in the ports labeled “EQPT1” and “EQPT2”). The range of Cisco SFP optics on the transponder supports any protocol and speed between 155 Mbps and 2.488 Gbps.

The transponder is compatible with the passive Cisco CWDM chassis (Figure 3) (part number CWDM-CHASSIS-2=). Two transponder devices can coexist together in the two-slot chassis. There is no limit to the number of chassis that can be stacked in a rack. Alternatively, the transponder can coexist in the same chassis with any Cisco CWDM passive filters.



**Figure 3.**  
Cisco CWDM chassis

Table 1 lists the compatible SFP optics required by each application.


**Table 1.** Supported SFP optics and applications

Client Protocol	Bit Rate (Mbps)	Client SFP (Product Number)	CWDM Line SFP (Product Number)	DWDM Line SFP (Product Number)
SONET/SDH	2488	SFP-OC48-SR SFP-OC48-IR1 SFP-OC48-LR2	<ul style="list-style-type: none"> <li>• CWDM-SFP-1470=</li> <li>• CWDM-SFP-1490=</li> <li>• CWDM-SFP-1510=</li> <li>• CWDM-SFP-1530=</li> </ul>	32 channels <ul style="list-style-type: none"> <li>• DWDM-SFP-3033=</li> <li>• DWDM-SFP-3112=</li> </ul>
	622	SFP-OC12-SR SFP-OC12-IR1 SFP-OC12-LR1 SFP-OC12-LR2 SFP-OC12-MM	<ul style="list-style-type: none"> <li>• CWDM-SFP-1550=</li> <li>• CWDM-SFP-1570=</li> <li>• CWDM-SFP-1490=</li> <li>• CWDM-SFP-1610=</li> </ul>	- <ul style="list-style-type: none"> <li>• DWDM-SFP-XXXX=</li> </ul>
	155	SFP-OC3-SR SFP-OC3-IR1 SFP-OC3-LR1 SFP-OC3-LR2 SFP-OC3-MM	<ul style="list-style-type: none"> <li>• ONS-SE-155-1470=</li> <li>• ONS-SE-155-1490=</li> <li>• ONS-SE-155-1510=</li> <li>• ONS-SE-155-1530=</li> <li>• ONS-SE-155-1550=</li> <li>• ONS-SE-155-1570=</li> <li>• ONS-SE-155-1590=</li> <li>• ONS-SE-155-1610=</li> </ul>	-
Gigabit Ethernet	1250	GLC-LH-SM= GLC-SX-MM= GLC-ZX-SM= GLC-BX-D= GLC-BX-U= SFP-GE-L= SFP-GE-S= SFP-GE-Z=	<ul style="list-style-type: none"> <li>• CWDM-SFP-1470=</li> <li>• CWDM-SFP-1490=</li> <li>• CWDM-SFP-1510=</li> <li>• CWDM-SFP-1530=</li> <li>• CWDM-SFP-1550=</li> <li>• CWDM-SFP-1570=</li> <li>• CWDM-SFP-1490=</li> <li>• CWDM-SFP-1610=</li> </ul>	32 channels <ul style="list-style-type: none"> <li>• DWDM-SFP-3033=</li> <li>• DWDM-SFP-3112=</li> </ul> - <ul style="list-style-type: none"> <li>• DWDM-SFP-XXXX=</li> </ul> - <ul style="list-style-type: none"> <li>• DWDM-SFP-5979=</li> <li>• DWDM-SFP-6061=</li> </ul>

Client Protocol	Bit Rate (Mbps)	Client SFP (Product Number)	CWDM Line SFP (Product Number)	DWDM Line SFP (Product Number)
Fibre Channel	1063	DS-SFP-FC-2G-LW= ONS-SE-G2F-LX= DS-SFP-FC-2G-SW= ONS-SE-G2F-SX=		
	2125	DS-SFP-FC-2G-LW= ONS-SE-G2F-LX= DS-SFP-FC-2G-SW= ONS-SE-G2F-SX=		

## Applications


The transponder is designed for situations where most of the equipment operates directly with pluggable optics, but a few platforms without WDM pluggable optics need to connect to the WDM network. Figure 4 shows an example of two sites connected through SONET links: The transponders at each location take the signals from the SONET equipment and convert them to CWDM channels, which communicate with passive Cisco CWDM devices.

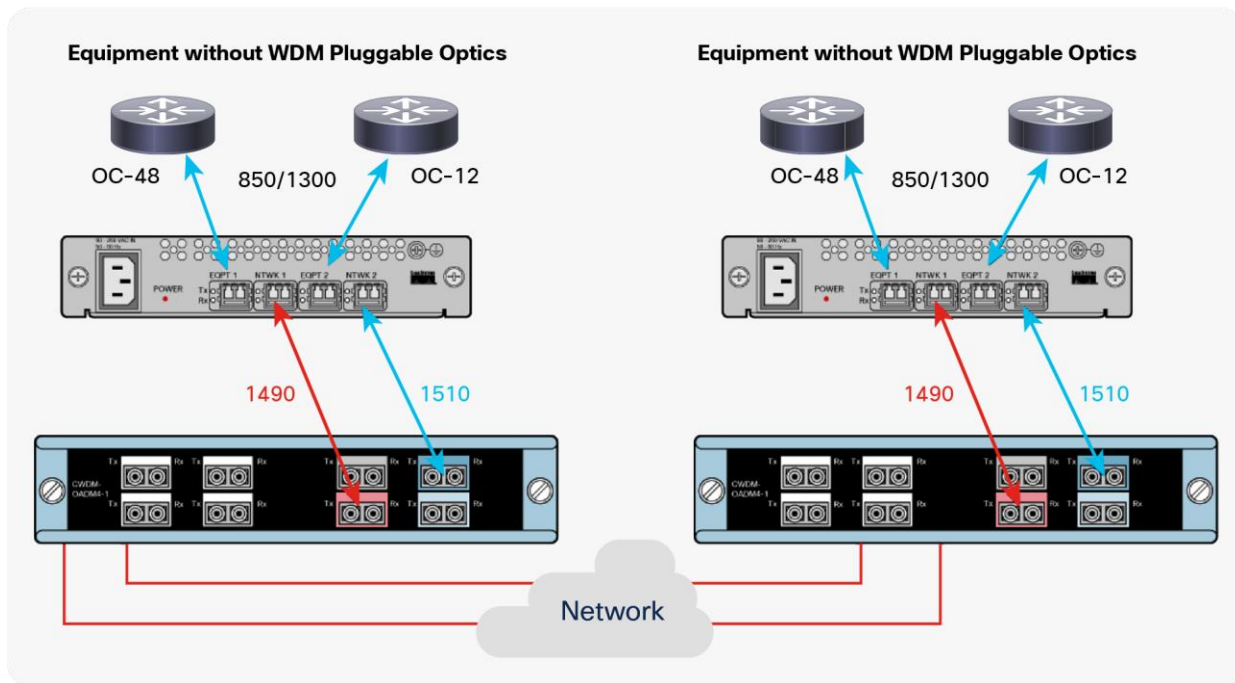

**Figure 4.**  
Example Deployment Scenario

## Product specifications

The Cisco 2-Channel SFP WDM Transponder is an unmanaged unit that runs no software. The front-panel LEDs (Figure 5) report various alarm conditions as summarized in Table 2. Tables 3 to 6 list product and optical specifications.

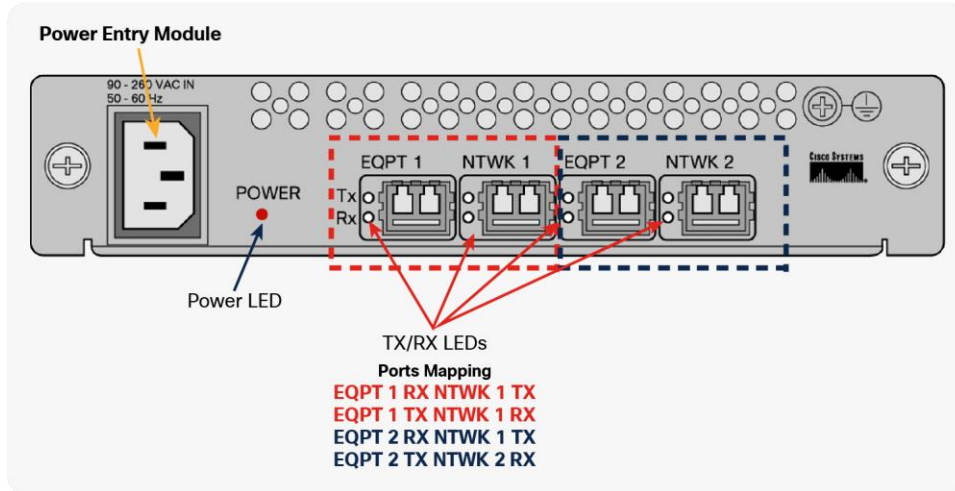

**Figure 5.**  
Front-Panel LEDs

**Table 2.** LED descriptions

Led Name	Color	Description
<b>POWER</b>	Green	Power on
	Off	Power off
<b>EQPT1/2 TX</b>	Green	Equipment 1 laser on
	Red	Equipment 1 laser off
	Off	Equipment 1 SFP not present
<b>EQPT1/2 RX</b>	Green	Equipment 1 signal detected
	Red	Equipment 1 loss of signal
	Flashing green	Equipment 1 loss of lock
	Off	Equipment 1 SFP not present
<b>NTWK1/2 TX</b>	Green	Network 1 laser on
	Red	Network 1 laser off
	Off	Network 1 SFP not present

Led Name	Color	Description
NTWK1/2 RX	Green	Network 1 signal detected
	Red	Network 1 loss of signal
	Off	Network 1 SFP not present

**Table 3.** Product specifications

Configuration	Parameter	Specification
Electrical	Supply voltage	90-240VAC
	Max power consumption	9.7W
	Connector type	IEC 60320 C14 inlet plug
Reliability	Mean time between failures (MTBF)	24.68 years
Mechanical	Dimensions	<ul style="list-style-type: none"> <li>6.91 in. (faceplate 8.25 in.) W</li> <li>1.6 in. H</li> <li>10 in. D</li> </ul>
	Weight (estimated with 4 SFPs)	4-5 lb
Environmental	Temperature	0-40° C
Performance	Bit rate	100-2500 Mbps
	Regeneration	<ul style="list-style-type: none"> <li>3R upstream (from client to trunk SFP)</li> <li>2R downstream (from trunk to client)</li> </ul>

**Table 4.** CWDM SFP optical specification (OC-3/STM-4, OC-48/STM-16, 1G Ethernet, 1G Fiber Channel and 2G Fiber Channel)

Parameter	Symbol	Minimum	Maximum	Units	Notes and Conditions
Transmitter Center Wavelength	$\lambda$	$(\lambda - 4)$	$(\lambda + 7)$	nm	Available center wavelengths are 1470, 1490, 1510, 1530, 1550, 1570, 1590, and 1610 nm
Side-Mode Suppression Ratio	SMSR	30		dB	
Transmitter Optical Output Power	Pout	0	5.0	dBm	Average power coupled into single-mode fiber
Receiver Optical Input Power (BER < 10-12 with PRBS 2-7-1)	Pin	-29.0	-7.0	dBm	Data rate below 2000 Mbps
Receiver Optical Input Power (BER < 10-12 with PRBS 2-7-1)	Pin	-28.0	-7.0	dBm	Data rate above 2000 Mbps
Receiver Optical Input Wavelength	$\lambda$	1450	1620	nm	

Parameter	Symbol	Minimum	Maximum	Units	Notes and Conditions
Transmitter Extinction Ratio	OMI	9		dB	
Dispersion Penalty at 100 km			2	dB	Data rate below 2000 Mbps
Dispersion Penalty at 100 km			3	dB	Data rate above 2000 Mbps

**Table 5.** CWDM SFP optical specification (OC-3/STM-1)

Parameter	Symbol	Minimum	Maximum	Units	Notes and Conditions
Transmitter Center Wavelength	$\lambda$	$(\lambda - 4)$	$(\lambda + 7)$	nm	Available center wavelengths are 1470, 1490, 1510, 1530, 1550, 1570, 1590, and 1610 nm
Transmitter Optical Output Power	Pout	0	5.0	dBm	Average power coupled into single-mode fiber
Receiver Optical Input Power (BER <10 <sup>-12</sup> with PRBS 2-7-1)	Pin	-34.0	-7.0	dBm	at 155 Mbps
Receiver Optical Input Wavelength	$\lambda$	1450	1620	nm	
Dispersion Penalty at 100 km			1	dB	at 155 Mbps

**Table 6.** DWDM SFP optical specification (OC-3/STM-4, OC-48/STM-16, 1G Ethernet, 1G Fiber Channel and 2G Fiber Channel)

Parameter	Symbol	Minimum	Maximum	Units	Notes and Conditions
<b>Transmitter</b>					
Spectral Width			0.2	nm	Full width, -20dB from maximum, with resolution bandwidth (RBW) = 0.01 nm
Transmitter Center Wavelength	$\lambda$	$\lambda - 100$	$\lambda + 100$	pm	Center wavelengths are in-line with Cisco DWDM channel plan and 100GHz ITU grid
Side-Mode Suppression Ratio	SMSR	30		dB	
Transmitter Extinction Ratio	OMI	8.2		dB	
Transmitter Optical Output Power	Pout	0	4.0	dBm	Average power coupled into single-mode fiber
<b>Receiver</b>					
Receiver Optical Input Wavelength	$\lambda$	1530	1565	nm	
Receiver Damage Threshold			-1	dBm	



Parameter	Symbol	Minimum	Maximum	Units	Notes and Conditions
Dispersion Tolerance		-500	1600	ps/nm	
<b>Power-Limited Performance at OSNR of 20 dB (&lt; 2000 Mbps) or 21 dB (&gt; 2000 Mbps) at 0.1-nm RBW</b>					
Optical Input Power	Pin	-28.0	-9.0	dBm	
Dispersion Power Penalty < 2000 Mbps			3	dB	-800/+3600 ps/nm
Dispersion Power Penalty > 2000 Mbps			3	dB	-800/+2400 ps/nm
<b>Noise-Limited Performance at OSNR of 18 dB (&lt; 2000 Mbps) or 19 dB (&gt; 2000 Mbps) at 0.1-nm RBW</b>					
Optical Input Power	Pin	-22.0	-9.0	dB	
Dispersion OSNR Penalty < 2000 Mbps			2	dB	-800/+3600 ps/nm
Dispersion OSNR Penalty > 2000 Mbps			3		-800/+2400 ps/nm

## Ordering information

To place an order, visit the Cisco ordering homepage. Table 7 lists ordering information for the Cisco 2-Channel SFP WDM Transponder.

**Table 7.** Ordering information

Product Name	Part Number
Cisco 2-Channel SFP WDM Transponder	WDM-SFP-2CH-CONV=

## Cisco environmental sustainability

Information about Cisco’s environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the “Environment Sustainability” section of Cisco’s [Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the “Environment Sustainability” section of the CSR Report) are provided in the following table:

Sustainability topic	Reference
Information on product material content laws and regulations	<a href="#">Materials</a>
Information on electronic waste laws and regulations, including products, batteries, and packaging	<a href="#">WEEE compliance</a>

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

## Service and Support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco Services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, see [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

## Cisco Capital

### Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).

### Contact Us

Phone: +852-51736677

Skype: wendycisco

WhatsApp: +852-51736677

E-mail: [wendy@donewin.com.hk](mailto:wendy@donewin.com.hk)